


# VSSL

## SX SERIES



### SPEAKER | SOUNDBAR | SUBWOOFER


VSSL introduces the latest in-home audio enjoyment with the SX series - a wireless 5.1-channel configuration utilizing the latest technology in audio to bring your TV and music to life. The SX Series is designed to bring the movie theater and music concert experience directly to your home. The system is sleek and powerful - with a soundbar, subwoofer, and 2 surround sound speakers enveloping you in your sound experience. Although this system is made to seamlessly work together - the SX speakers, subwoofer, and soundbar can also be utilized individually. The SX Series utilizes many of the other features of our VSSL devices - such as Airplay 2 and Siri, Chromecast Built-In and Google Assistant, Alexa Cast and Alexa, Spotify Connect, Bluetooth; and more!



SET YOUR MUSIC FREE™

# VSSL


## SX SOUNDBAR

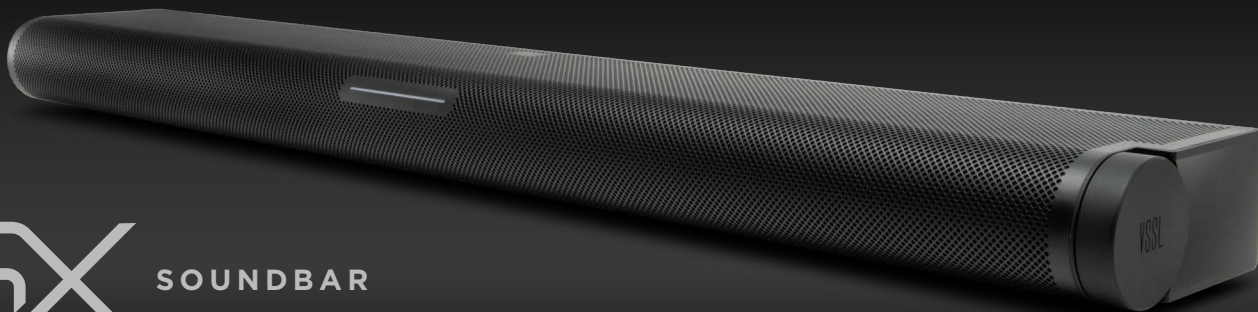

- Dolby Digital Certified.
- Wirelessly pair an SX Soundbar with 2 or 4 SX speakers and an SX Sub to create an expandable 5.1 surround sound experience.
- Wirelessly pair an SX Soundbar with any amp and in-ceiling speakers via the SX Sync for in-ceiling Dolby Digital surrounds.
- 3" BMR Drivers - Balanced Mode Radiators (BMRs) combine bending wave mode technology with pistonic motion to create full audio range, wide directivity speaker drivers for crystal clear highs and lows.
- Native Streaming is the simplest way to stream your music to your audio system. Stream from apps you already know. No 3rd party apps necessary. Airplay 2, Google Cast, Spotify Connect.
- Compatible with Google Assistant and Siri voice control.
- HDMI eARC/ARC Compatible (Optical as well).
- Single RCA LFE output connection for use with hardlined 3rd party subwoofers.


## SPECIFICATIONS

<b>Amplifier:</b>	(3) Class-D digital amplifiers	<b>Room Correction:</b>	Dynamically tunes the soundbar to the unique acoustics of the room area (iOS device required)
<b>Speakers:</b>	(3) Wide dispersion BMR drivers	<b>Power Supply:</b>	Auto-switching 100-240V ~50-60Hz 2 A AC universal input
<b>Woofers:</b>	(2) Active down-firing woofers	<b>Weight:</b>	18.2lbs
<b>System Requirements:</b>	TV with HDMI ARC/eArc or optical digital audio output, broadband internet, and the VSSL app	<b>Dimensions:</b>	L: 42.00" (1067mm) x W: 6.06" (154mm) x H: 3.30" (84mm)
<b>Wireless Connectivity:</b>	Connects to WiFi network with any 802.11 b/g/n, 2.4GHz broadcast-capable router	<b>Operating Temperature:</b>	32° to 104°F (0°-40° C)
<b>Equalization:</b>	Basic EQ settings	<b>Multiple Orientations:</b>	Tabletop placement (built-in rubber feet) or wall mounted (mount included)
<b>Ethernet Ports:</b>	(2) 10/100 Mbps Ethernet ports (optional)	<b>Control:</b>	Use your TV remote or the VSSL app
<b>Built-in IR:</b>	Learns volume commands for any IR remote		

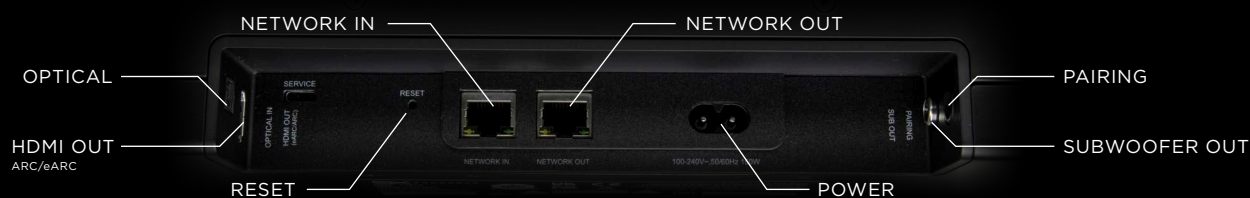

# VSSL

## SX SPEAKER

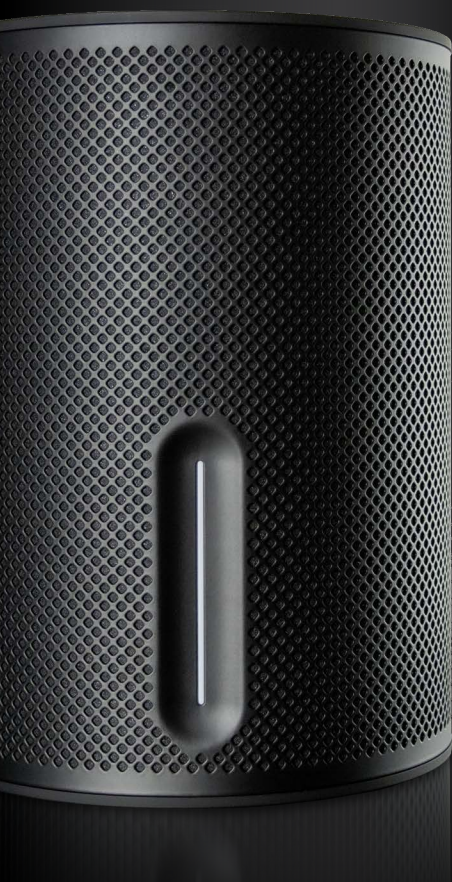

- Wirelessly pair 2 - 4 speakers with an SX Soundbar and an SX Subwoofer to create an expandable 5.1 surround sound experience.
- Wirelessly pair the combination of up to 8 SX Speakers and SX Subwoofers for stereo audio content.
- 3" BMR Driver - Balanced Mode Radiators (BMR) combines bending wave mode technology with pistonic motion to create a full audio range, wide directivity speaker driver for crystal clear highs and lows.
- Native Streaming is the simplest way to stream your music to your audio system. Stream from apps you already know. No 3rd party apps necessary. Airplay 2, Google Cast, Spotify Connect.
- Compatible with Google Assistant and Siri voice control
- Using a wall bracket with the built-in universal 1/4"-20 thread, mount not included)



## SPECIFICATIONS

<b>Speaker:</b>	Wide dispersion BMR
<b>Woofers:</b>	4" Active down-firing
<b>Stereo Pair:</b>	Turn two speakers into separate left and right channel speakers
<b>Group Audio:</b>	Combine up to 8 speakers + subs for a single zone of audio
<b>Home Theater:</b>	Add two or four SX Speakers as surrounds to an SX soundbar
<b>Stream:</b>	Compatible with Airplay 2, Google Cast, and Spotify Connect
<b>Voice:</b>	Compatible with Siri and Google Assistant

<b>Wireless Connectivity:</b>	Connects to WiFi network with any 802.11 a/b/g/n, 2.4 or 5GHz broadcast-capable router
<b>Equalization:</b>	Basic EQ settings
<b>Ethernet Ports:</b>	(2) 10/100 Mbps Ethernet ports (optional)
<b>Power Supply:</b>	Auto-switching 100-240V ~50-60Hz 2 A AC universal input
<b>Weight:</b>	4.6lbs
<b>Dimensions:</b>	H: 7.95" (202mm) x W: 5.70" (145mm) x D: 5.86" (149mm)
<b>Operating Temperature:</b>	32° to 104°F (0°-40° C)
<b>Multiple Orientations:</b>	Tabletop or wall mounted with 0.25"-20 thread universal mount

# VSSL

## SX SUBWOOFER



- 10" Fiberglass Driver
- Wirelessly pair with an SX Soundbar and 2 - 4 SX Speakers to create an expandable 5.1 surround sound experience.
- The SX Subwoofer's versatile profile allows it to be installed horizontally (fits under furniture) or vertically (sturdy subwoofer stand included), seamlessly blending into any environment.
- Single RCA LFE input connection for use with hardlined 3rd party amps/soundbars.



## SPECIFICATIONS


**Amplifier:** Class-D digital amplifier  
**Woofers:** 10" Honeycomb  
**Dual Acoustic Ports:** Tuned to enhance subwoofer performance  
**Freq. Response:** 25Hz  
**All Digital Sound:** All filter settings, active EQ, and time alignment are done digitally through DSP circuitry for zero-loss audio quality and energy  
**Equalization:** Basic EQ settings  
**Wireless Connectivity:** Connects to any SX Soundbar or SX Speaker

**Power Supply:** Connects to any SX Soundbar or SX Speaker  
Auto-switching 100-240V ~50-60Hz 2 A AC universal input  
**Weight:** 29.8lbs  
**Dimensions:** L: 21.65" (550mm) x W: 16.96" (431mm) x H: 4.37" (111mm)  
**Operating Temperature:** 32° to 104°F (0°-40° C)  
**Multiple Orientations:** Upright in stand (included) or lay flat (built-in rubber feet)

## SX SYNC



- Connects to SX Soundbar wirelessly (SX Soundbar is required)
- L+R RCA outputs to create Surround Sound 5.1 system rear speakers
- Works with any amplifier that uses RCA Inputs

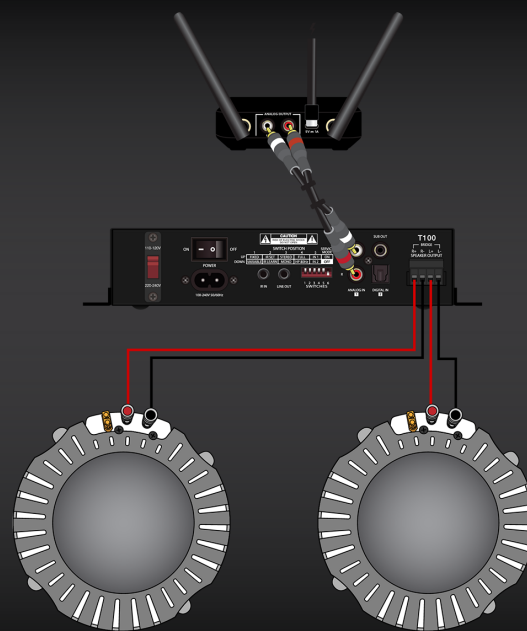

## SPECIFICATIONS

**Required Product:** SX Soundbar, Amplifier, In-Ceiling Speakers, VSSL Mobile App

**Equalization:** Basic EQ Settings

**Analog Inputs:** Dual RCA cable connects to SX Sync line-level Output

**Antennas:** Single band, omni-directional radio antennas (required in order to function)

**Power Supply:** 5v / 1A USB Type-C power jack

**Content:** Plays left and right rear Dolby Digital surround 5.1 and 2.0 PCM audio content

**Range:** 320 ft (line of sight)

**Wireless Connectivity:** Connects to SX soundbar via RF

**Dimensions:** L: 3.75" (95.25mm) x W: 3.875" (98.43mm) x 3.75" (95.25mm)

**Weight:** 0.35 lbs

**Operating Temperature:** 32° to 10°F (0-40°C)

**Package Contents:** SX Sync, Power Adapter, Power Cord, Antennas